



INSTRUCTION SHEET

for: **Part No. 2BE 980 690-30x**



APPLICATION AND
MOUNTING INSTRUCTIONS

83mm ROUND LED FRONT INDICATOR / FRONT POSITION LAMP
24V DC

Features

- 13 LED design
- Low power consumption
- Reverse polarity protected
- Built-in spike protection
- Ultra long service life
- Fully sealed against dust and water
- Withstands most vibration and mechanical shock applications
- Manufactured from the latest "high tech" lens material with enhanced impact and chemical tolerance
- Flush mount for low profile appearance

Lens Marking and Installation Requirements



This Front Indicator / Front Position Lamp, identified by lens marking  5854 and the  logo, was manufactured to comply with:

ECE Regulation 6 Category 1 for Front Direction Indicator Lamps



ECE Regulation 7 for Front Position (side) Lamps

- Lamp mounting surface must be vertical to the ground, and at right angles to the longitudinal axis of the vehicle.
- Lamp must be visible from 45° inboard and 80° outboard, as well as from 15° above and below the horizontal axis.
- Lamps must be mounted no less than 350 mm and no more than 1500 mm above the ground.
- Lamps to be mounted within 400 mm of the widest point of the vehicle and no closer than 600 mm together.
- Lamp is approved to be mounted only with lens engraving "TOP" located correctly.



Front View



Top View



Side View

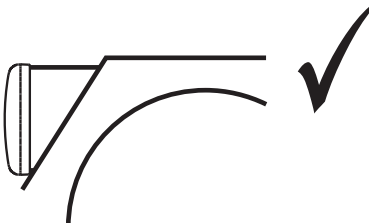

HELLA-New Zealand Limited, Auckland, New Zealand

980 703-58 V03



HELLA New Zealand

Mounting Instruction
Anbauanweisung

HKG-LHK Ke
31485
07.01.2010

Type: 2BE 980 690

Page 1 / Seite 1

Belongs to approval no.: E24 5854

Gehört zu Gen.-Nr.:

Daytime Running Lamp and / or Front Position Lamp and / or Direction Indicator
optionally grouped for Automobile.

Tagfahrleuchte und / oder Begrenzungsleuchte und / oder Fahrtrichtungsanzeiger
wahlweise zusammengebaud für Kraftfahrzeuge.

Light source(s):
Lichtquelle(nl):

Daytime Running Lamp

Design voltage:
Prüfspannung:

Nominal voltage:
Nennspannung:

Nominal power:
Nennleistung:

Front Position Lamp

1 LED

28.0V

24.0V

1.0W

Direction Indicator
Fahrtrichtungsanzeiger

12 LED

28.0V

24.0V



4.0W

≡ = Centre of reference in accordance with the ECE-Regulations - No. 6, 7, 87.
Bezugspunkt nach den ECE-Regelungen - Nr. 6, 7, 87.

✧ = Centre of reference for the definition for illuminating surface in accordance with the Council Directive
76/756 EEC or ECE-Regulation No. 48 (see Annex A)
Bezugspunkt zur Bestimmung der Grenzen der leuchtenden Fläche nach 76/756 EWG bzw. ECE-Regelung Nr. 48.

Markierung s. auf der Abschluss-Scheibe. Maße s. Anlage A.
Axis of reference: Parallel to the car centre line and parallel to the road.

Bezugsachse: Parallel zur Fahrzeuglängsachse und parallel zur Fahrbahn.

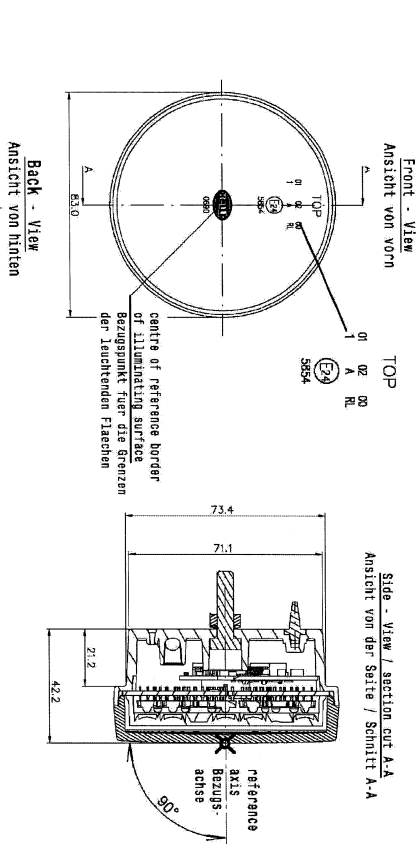

The device must be mounted according to the enclosed fitting documents (e.g. sketch + Annex A).
Der App. bzw. Einbau der Geräte hat nach anliegenden App. bzw. Einbauanweisungen (z.B. Skizze und Anlage A) zu erfolgen.



HELLA New Zealand

Mounting Instruction
Anbauanweisung

HKG-LHK Ke
31485
07.01.2010

Type: 2BE 980 690

Page 2 / Seite 2

Belongs to approval no.: E24 5854

Gehört zu Gen.-Nr.:

Daytime Running Lamp and / or Front Position Lamp and / or Direction Indicator
optionally grouped for Automobile.

Tagfahrleuchte und / oder Begrenzungsleuchte und / oder Fahrtrichtungsanzeiger
wahlweise zusammengebaud für Kraftfahrzeuge.

Light source(s):
Lichtquelle(nl):

Daytime Running Lamp

Design voltage:
Prüfspannung:

Nominal voltage:
Nennspannung:

Nominal power:
Nennleistung:

Front Position Lamp

1 LED

28.0V

24.0V

1.0W

Direction Indicator
Fahrtrichtungsanzeiger

12 LED

28.0V

24.0V



4.0W

≡ = Centre of reference in accordance with the ECE-Regulations - No. 6, 7, 87.
Bezugspunkt nach den ECE-Regelungen - Nr. 6, 7, 87.

✧ = Centre of reference for the definition for illuminating surface in accordance with the Council Directive
76/756 EEC or ECE-Regulation No. 48 (see Annex A)
Bezugspunkt zur Bestimmung der Grenzen der leuchtenden Fläche nach 76/756 EWG bzw. ECE-Regelung Nr. 48.

Markierung s. auf der Abschluss-Scheibe. Maße s. Anlage A.
Axis of reference: Parallel to the car centre line and parallel to the road.

Bezugsachse: Parallel zur Fahrzeuglängsachse und parallel zur Fahrbahn.

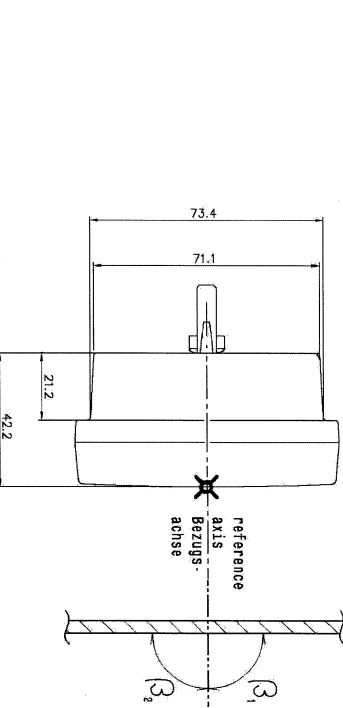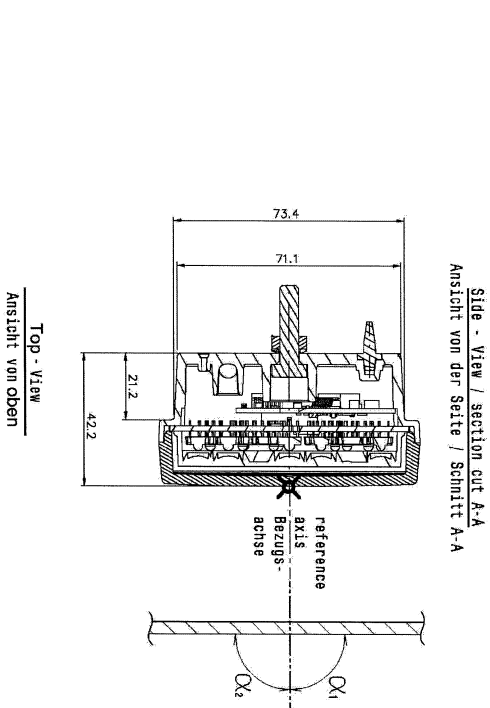

The device must be mounted according to the enclosed fitting documents (e.g. sketch + Annex A).
Der App. bzw. Einbau der Geräte hat nach anliegenden App. bzw. Einbauanweisungen (z.B. Skizze und Anlage A) zu erfolgen.

Lamp Mounting

1/4" Ø Nut, bolt and washer have been supplied with this product.

Lamp should be mounted on a flat surface. Drill one mounting hole between 6.5mm and 8mm in diameter. A small 5mm location hole is also recommended to assist in mounting the lamp accurately and to stop the lamp from rotating during or after installation. This can be done using the supplied location pin.


If passing the cable through a hole, ensure there are no sharp edges to cut or chafe the cable.

Drill a cable exit hole 6mm diameter in the position as shown on diagram below.


Ensure the lens engraving "TOP" is located correctly.

Connect lamp wiring as per chart below.

Try to keep the cable as long as possible, preferably join the cable inside a sealed cable junction box.

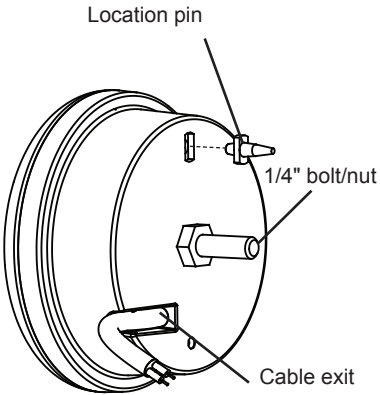

General Dimensions (mm)

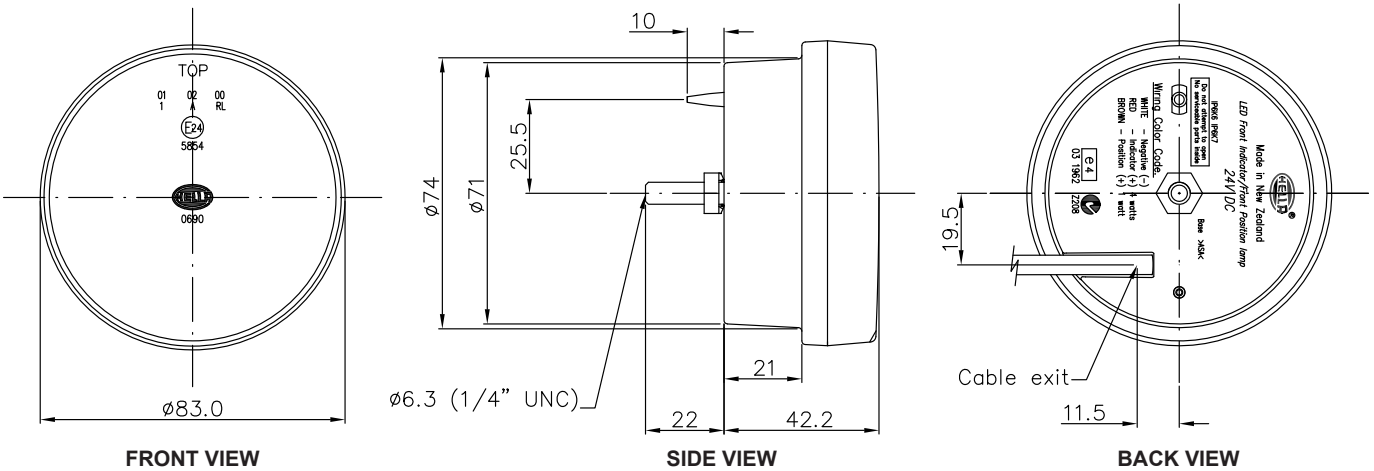

Wiring Colour Coding

This lamp is for 24 volt applications only. LED modules are polarity conscious. Reverse polarity will not damage this product but will inhibit its function. HELLA recommends wire connections be soldered, and heat shrink tubing applied to seal the joint.

Colour	Connect to	Power Consumption
White	Negative (-)	-
Red	Front Indicator (+)	4 watts
Brown	Front Position (+)	1 watt

NB: Lamp must be protected by a fuse rated at 5 amperes maximum.

Introduction

LED signal and marker lamps offer many advantages over conventional bulb lamps. Significantly reduced power consumption, ultra long life and high tolerance to shock and vibration make the LED lamps the ideal choice for the commercial transport industry, where the cost of ownership versus the initial purchase price of the product is well understood.

Compatibility to existing electrical systems

It is important for the installer to ascertain the compatibility of the low power consumption LED lamps with the electrical and/or electronic systems of the complete vehicle, including trailers. In most cases the reduced power consumption is beneficial by imposing less demands on the entire electrical system. For certain functions some electrical systems rely on a set power consumption for monitoring whether, for example, an indicator globe has failed or a trailer is connected.

Electromagnetic Compatibility (EMC)

This LED lamp is an electronic device. The electrical circuits contain components that suppress possible interference, both emission as well as susceptibility, to the limits prescribed in UNECE Vehicle Regulation No. 10. To avoid false signals or interference, it is standard practice that sensitive instrumentation such as ABS and Tachometers etc. are provided with direct earths.

Protection against damage due to voltage spikes

This LED lamp is protected against damage from positive voltage spikes caused by events such as load dump conditions specified in ISO 7637-2. The lamp is protected against reverse polarity connection and negative voltage spikes of up to 1000 volts.

Electric Welding

Electric Welding may damage the LED lamps. For LED lamps, HELLA recommends the negative connection to be wired isolated from the vehicle chassis. If the lamp uses the chassis as the earth return it is recommended that this earth return is disconnected during electric welding.

FIT AND FORGET - BY DESIGN

Congratulations, the product you have selected comes from **HELLA** - a world leader in LED lighting design.



Following the launch of the first LED automotive signal lamps in 1990, **HELLA** Design and Innovation continues to set new standards. **HELLA** innovative solutions have been incorporated into millions of lamps, engineered and tested to the most stringent standards, to suit the most demanding environmental conditions.

The cornerstone to the success of our products is our no compromise **Fit and Forget - by Design** philosophy which is incorporated into every step of the product life cycle.

In a world consuming finite resources at an ever faster rate, **Fit and Forget - by Design** is the right environmental choice that also makes perfect economic sense to customers that consider the total life cycle Cost of Ownership.