


INSTRUCTION SHEET
for: **2BA 959 075-xxx / 2156-12V & 2156-24V**




ADR - APPLICATION AND MOUNTING INSTRUCTIONS

ADR 6/00 2a Rear Direction Indicator Lamps



LED REAR DIRECTION INDICATOR LAMP

Lens Marking and ADR 13/00 Installation Requirements


This lamp is identified by lens marking 9074 and the  logo, with amber lens was manufactured to comply with ADR 6/00 Cat 2a Rear Direction Indicator Lamps.

- A tolerance of +/-3 degrees applies on all mounting details.
- Lamp mounting surface must be vertical to the ground, and its reference axis parallel to the vehicle longitudinal axis
- Lamp must be visible from 45° inboard and 80° outboard, as well as from 15° above and below the horizontal axis
- Lamp is approved to be mounted horizontally or vertically

Please refer to ADR 13/00 for more details.

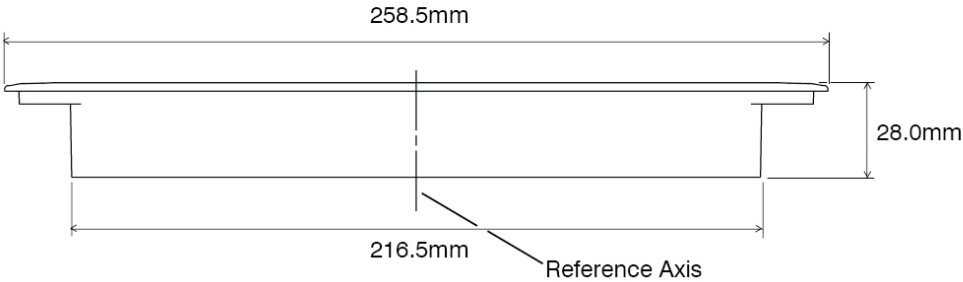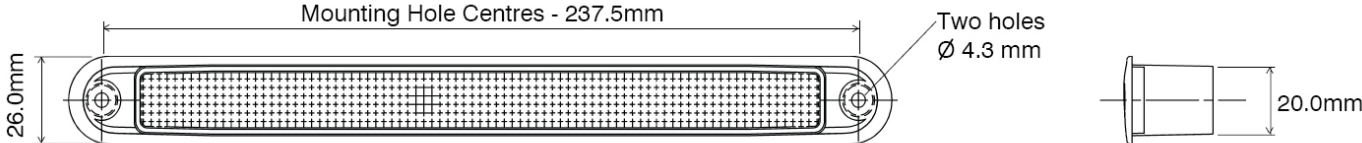


LENS IDENTIFICATION NUMBER: 9074

CATALOGUE NUMBER	ENGINEERING NUMBER	CRN NUMBER	COMPLIANCE NUMBER	ADR 51/00 GLOBE	ADR APPLICABLE
2156 2156-24V	2BA 959 075-50 2BA 959 075-00	26483 26104	8-2156A-08 8-2156-08	N/A LED	ADR 6/00 Cat 2a
AMENDMENTS			ADR COMPLIANCE VERIFIED 	ISSUE DATE: 11/00	
12/10	01/12				
				959 149-28	

Hella-New Zealand Limited, Auckland

959 149-28 / 05.19

INSTRUCTION SHEET
for: **2BA 959 075-xxx / 2156-12V & 2156-24V**




ADR - APPLICATION AND MOUNTING INSTRUCTIONS

ADR 6/00 2a Rear Direction Indicator Lamps



LED REAR DIRECTION INDICATOR LAMP

Lens Marking and ADR 13/00 Installation Requirements


This lamp is identified by lens marking 9074 and the  logo, with amber lens was manufactured to comply with ADR 6/00 Cat 2a Rear Direction Indicator Lamps.

- A tolerance of +/-3 degrees applies on all mounting details.
- Lamp mounting surface must be vertical to the ground, and its reference axis parallel to the vehicle longitudinal axis
- Lamp must be visible from 45° inboard and 80° outboard, as well as from 15° above and below the horizontal axis
- Lamp is approved to be mounted horizontally or vertically

Please refer to ADR 13/00 for more details.

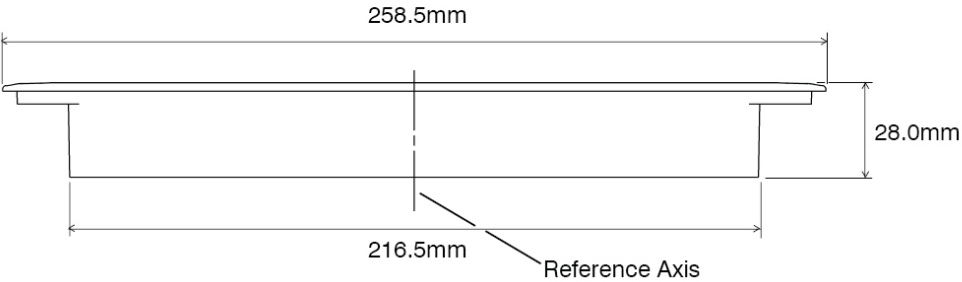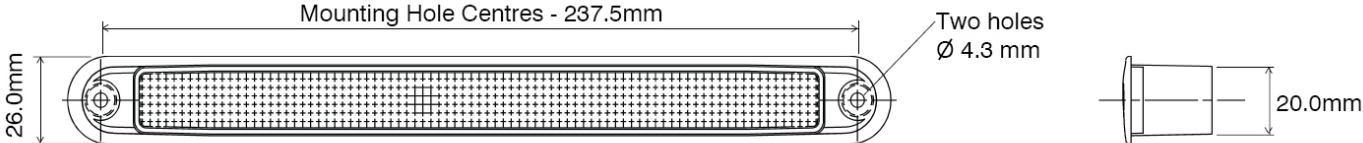

LENS IDENTIFICATION NUMBER: 9074

CATALOGUE NUMBER	ENGINEERING NUMBER	CRN NUMBER	COMPLIANCE NUMBER	ADR 51/00 GLOBE	ADR APPLICABLE
2156 2156-24V	2BA 959 075-50 2BA 959 075-00	26483 26104	8-2156A-08 8-2156-08	N/A LED	ADR 6/00 Cat 2a
AMENDMENTS			ADR COMPLIANCE VERIFIED 	ISSUE DATE: 11/00	
12/10	01/12				
				959 149-28	

Hella-New Zealand Limited, Auckland

959 149-28 / 05.19

Lamp Mounting Instructions

Determine mounting position and holes per diagram overleaf. (Before fitment see **Wiring Colour Coding** below)

Ensure gasket is fitted to lamp to provide a weather tight seal. Fit lamp to mounting aperture with the screws provided.

Fit screw caps.

Note:
Do not overtighten mounting screws in lens.

Wiring Colour Coding

Note: Lamp is polarity conscious. The reversal of the polarity will not damage this product but will inhibit its function.

Wire Colour	Connect to	Power Consumption
Amber	Positive	Less than 2 watts
Black	Negative	-

NB: Lamp must be protected by a fuse rated at 2 amperes maximum.

Warranty Statement

Congratulations! The product you have selected comes from Hella - one of the world's leading manufacturers of automotive and marine products.

Hella branded products are covered by a warranty against manufacturing or material defects. (For further details check Hella's terms of trade with your dealer).

The lamp is sealed and does not have any serviceable parts inside; opening the lamp will invalidate warranty.

In the unlikely event that you should experience a problem with this product, please contact your Hella dealer where you purchased the product.



Lamp Mounting Instructions

Determine mounting position and holes per diagram overleaf. (Before fitment see **Wiring Colour Coding** below)

Ensure gasket is fitted to lamp to provide a weather tight seal. Fit lamp to mounting aperture with the screws provided.

Fit screw caps.

Note:
Do not overtighten mounting screws in lens.

Wiring Colour Coding

Note: Lamp is polarity conscious. The reversal of the polarity will not damage this product but will inhibit its function.

Wire Colour	Connect to	Power Consumption
Amber	Positive	Less than 2 watts
Black	Negative	-

NB: Lamp must be protected by a fuse rated at 2 amperes maximum.

Warranty Statement

Congratulations! The product you have selected comes from Hella - one of the world's leading manufacturers of automotive and marine products.

Hella branded products are covered by a warranty against manufacturing or material defects. (For further details check Hella's terms of trade with your dealer).

The lamp is sealed and does not have any serviceable parts inside; opening the lamp will invalidate warranty.

In the unlikely event that you should experience a problem with this product, please contact your Hella dealer where you purchased the product.

