Important Notes for Installer and Vehicle Owner



Introduction

This Multivolt LED lamp offers many advantages over conventional bulb lamps. Significantly reduced power consumption, ultra long life and high tolerance to shock and vibration make these HELLA LED lamps an outstanding investment into your safety.

Daytime Running Lamps

Daytime running lamps are not a substitute for dipped beam headlights at dusk/dawn or during darkness. It is important for the installer to check that the daytime running lamps illuminate only when the vehicle lighting is switched OFF and the ignition is switched ON.

Compatibility to existing electrical systems

It is important for the installer to ascertain the compatibility of the low power consumption LED lamps with the electrical and/or electronic systems of the complete vehicle. In most cases the small additional power consumption of the daytime running lamp will not impose significant demands to the electrical system of the vehicle.

Electromagnetic Compatibility (EMC)

This LED lamp in an electronic device. The electrical circuits contain components that suppress possible interference, both emission as well as susceptibility, to the technical requirements for the application of the Regulatory Compliance Mark (RCM). Additionally the electrical circuits conform to the limits prescribed in UNECE Vehicle Regulation No. 10.

Protection against damage due to voltage spikes

This LED lamp is protected against damage from positive voltage spikes caused by events such as load dump conditions specified in ISO 7637-2.

The lamp is protected against reverse polarity connection and reverse voltage spikes up to minus 1000 volts.

Electric Welding

Electric Welding may damage the LED lamps. For LED lamps, HELLA recommends the negative connection to be wired isolated from the vehicle chassis. If the lamp uses the chassis as the earth return it is recommended that this earth return is disconnected during electric welding.

FIT AND FORGET - BY DESIGN



Congratulations, the product you have selected comes from HELLA - a world leader in LED lighting design.

Following the launch of the first LED automotive signal lamps in 1990, HELLA Design and Innovation continues to set new standards. HELLA innovative solutions have been incorporated into millions of lamps, engineered and tested to the most stringent standards, to suit the most demanding environmental conditions.

The cornerstone to the success of our products is our no compromise Fit and Forget - by Design philosophy which is incorporated into every step of the product life cycle.

In a world consuming finite resources at an ever faster rate, *Fit and Forget - by Design* is the right environmental choice that also makes perfect economic sense to customers that consider the total life cycle Cost of Ownership.

For general comments about HELLA's products please contact us on E-mail at techfeedback@hella.co.nz

APPLICATION AND MOUNTING INSTRUCTIONS


LED DAYTIME RUNNING LAMP (DRL) Multivolt 9 - 33V DC

Lens Marking and Installation Requirements

This lamp, identified by lens marking (E_{24}) 0002 and the (E_{24}) logo was manufactured to comply with ECE Regulation No. 87 for Daytime Running Lamp.

- The reference axis of the lamp must be parallel to the longitudinal axis of the vehicle (i.e. The lens of the lamp should be vertical to the ground and perpendicular to the direction of travel).
- The centre line of the lamp must be parallel to the ground.
- Lamp must be visible from 20° inboard and outboard, as well as from 10° above and below the horizontal axis.
- Two lamps are required for motor vehicles.
- Lamps must be mounted no less than 250 mm and no more than 1500 mm above the ground.
- Lamps should not be mounted closer than 600 mm together (400 mm if vehicle width is less than 1300 mm).

Notes: Please refer to ECE Regulation No. 48 for more details.



LENS IDENTIFICATION NUMBER: 00 RL E24 0002


Product Contents

Daytime Running Lamp with 0.5 m cable	x1
DRL Foot A	x1
DRL Foot B	x1
Stainless Steel DRL Foot Fastening Screw	x2
Stainless Steel DRL Mounting Bolt, Nut & Washer	x2
3-Pole Super Seal Socket Connector	x1
Application and Mounting Instructions	x1


HELLA-New Zealand Limited, Auckland,

INSTRUCTION SHEET for: Part No. 1004 / 2PT 980 670-001







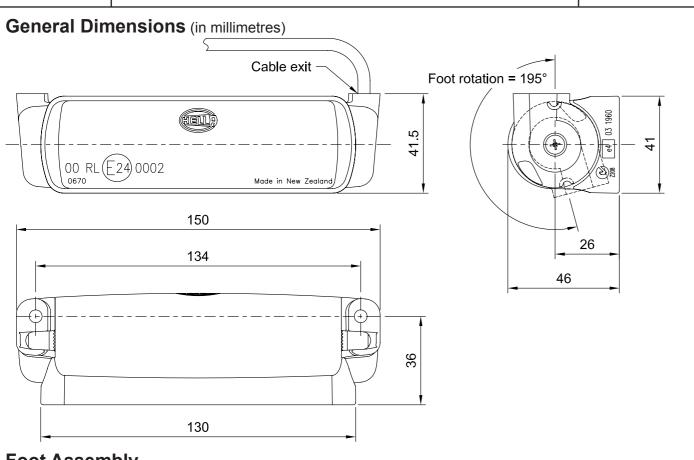


Foot Assembly

- DRL Foot A, marked with an "A" on the inside, can be assembled to the cable end of the lamp.
- DRL Foot B, marked with an "B" on the inside, can be assembled to the opposite end of the lamp.
- The DRL Feet can be rotated from 0° to 195° in 5° increments to suit mounting surfaces that are not horizontal in their orientation. See General Dimensions above.
- Once the DRL Feet are in the desired location, tighten the Foot Fastening Screws until they are secure (maximum torque of 1.5Nm).

Mounting and Cable Routing

- Drill two 6 mm Ø mounting holes at 134 mm centres through the mounting surface. See General Dimensions and Installation Requirements for correct positioning.
- There are two options to route the cable:
 - 1. Cable routing though the mounting surface: Drill a 5.5 to 7.0 mm Ø hole as per the diagram on the page opposite. Ensure that the hole has no sharp edges to cut or chafe the cable when it is fed through the hole.
 - 2. Cable routing through the DRL Foot: Using side cutters make two vertical cuts to remove the side wall of the DRL Foot as per the diagram below.

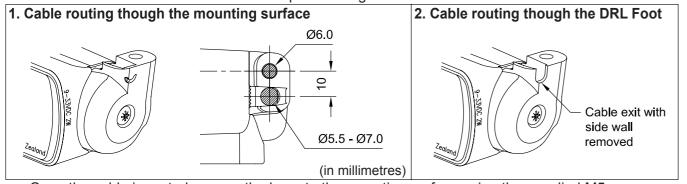

Once the cable is routed, secure the lamp to the mounting surface using the supplied M5 screws, washers and nuts.


			INSTRUCTIO	
for:	Part	No.	1004	/ 2

Wiring Instructions

This LED lamp will illuminate when the supply voltage (+) is applied to the BLACK wire. The lamp will automatically switch OFF when power (+) is applied to the GREY cable when the vehicle's lighting is switched ON.

Colour	Connector Location	Connect to	Function	Power Consumption
Brown	Pin 2	Terminal (31): Earth (-)	-	-
Black	Pin 1	Terminal (15): Ignition (+)	DRL ON	Less than 2 watts
Grey	Pin 3	Either, Terminal 58: Front Position Lamp (+) Or, Terminal 56: Headlamp - Dipped Beam (+)	DRL OFF	-

Note 1: Lamp must be protected by a fuse rated at 5 amperes maximum. Note 2: Lamp is polarity conscious. The reversal of the polarity will not damage this product but will inhibit its function.

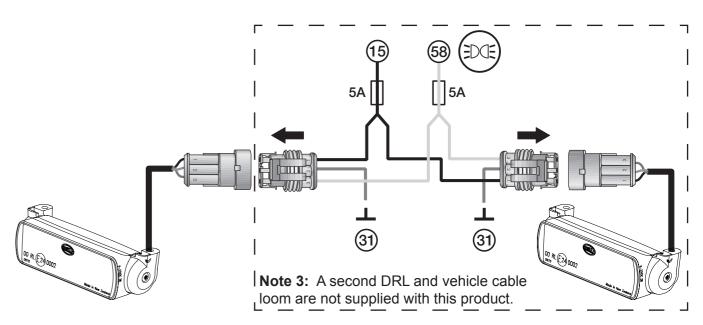

Super Seal Connector Assembly (Use is optional)


- The lamp has been pre-assembled with terminals and seals to suit the supplied 3-Pole Super Seal • Connector.
- HELLA recommends that the terminals are assembled into the connector in the configuration shown to the riaht.
- Once the configuration is confirmed, push the terminals firmly until they click into place.

Note 4: Always confirm the terminal configuration before assembling the connector as the Hella recommendation might not suit some installations, particularly if retrofitting the lamp to an existing DRL installation.

Note 5: Please contact your Hella supplier if matching Super Seal plug connectors, terminals and seals are required.

ON SHEET 2PT 980 670-001







ECE TYPE-APPROVAL CERTIFICATE

Communication concerning approval granted of a type of daytime running lamp pursuant to Regulation No. 87.



Approval No: <u>E24 87R-000002.</u>

Reason(s) for extension:

1. Trade name or mark of the device:

Manufacturer's name for the type of device: 2.

- Manufacturer's name and address: 3.
- 4. If applicable, name and address of manufacturer's representative:
- Submitted for approval on: 5.
- Technical service responsible for conducting approval tests: 6.

Date of test report issued by that service: 7.

8. Number of report issued by that service:

CT-11-42 Rev 2

HELLA

2PT 980 670

Hella New Zealand Limited 81-83 Ben Lomond Crescent. Pakuranga, Auckland, New Zealand

Extension No: N/A.

-N/A

Hella Leuchten-Systeme GmbH Salzkottener Str. 1 D-33106 Paderborn Germany

11.09.2009

FAKT S.r.l, Via Lithos, 53, I-25086 Rezzato (BS), Italy.

18.09.2009

IT09/0645-00

49.88U.52.6.2 Page 1 of 2

Approval No: *E24 87R-000002*.

Concise description: 9.

> By category of lamp: Number, category and kind of light source(s):

Voltage and wattage:

Application of an electronic light source control gear: -being part of the lamp (yes/no): -being not part of the lamp (yes/no):

Input voltage supplied by an electronic light source control gear:

Electronic light source control gear manufacturer and identification number (when the light source control gear is part of the lamp but is not included into the lamp body):

Geometrical conditions of installation and relating variations, if any:

10. Position of the approval mark:

- 11. Reason(s) for extension (if applicable):
- Approval granted/extended/refused/withdrawn: 12.
- 13. Place:
- 14. Date:

15. Signature:

The following documents, bearing the approval number shown above, are available on request: 16.

- Technical report IT09/0645-00
- Manufacturer's information document 09-0645-00

Documentation:

NSAI, 1 Swiftsquare, Northwood, Santry, Dublin 9, Ireland. Telephone: (+353+1) 807 3800, Facsimile: 01-807 3844

CT-11-42 Rev 2

Extension No: N/A

RL. 12-LEDs 9V-33V, 2W

> No No

N/A.

N/A.

Reference axis parallel to the median longitudinal plane of the vehicle and parallel to the bearing plane of the vehicle on the road (see drawings of the information folder).

See drawings of the information folder

N/A.

Granted


Dublin.

23rd September 2009.



29 pages.

49.88U.52.6.2 Page 2 of 2

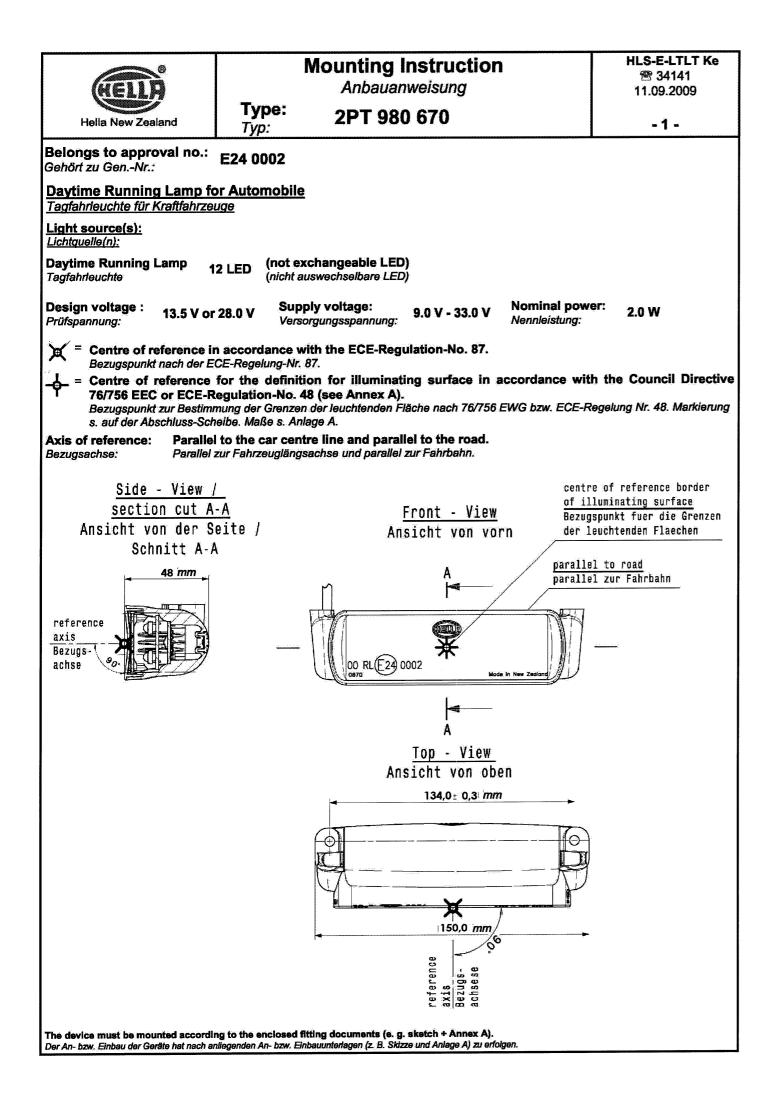

HELLA New Zealand	Type: Typ:	2PT
Belongs to approval no.: Gehört zur Gen. Nr.:	E24 0002	
Determining the borders of of the Council of the Europe 76/756 EEC and ECE-Regu Bestimmung der Grenzen der des Rates der Europäischen (nach 76/756/EWG, bzw. ECE	ean Community on " ulation No. 48, sub-s leuchtenden Fläche e Gemeinschaften " Anb a	Mounting of ection 2.9.2 iner Leuchte au von Bele
		T State
	T	
	B	
		14
	. ← 0	
Category of Lamp Gerätebezeichnung	Top edge Obere Grenz (T)mm	e Uni (
Daytime Running Lamp Tagfahrleuchte	13	

accordance with the Directives of lamps and light signalling equipment" gemäß den Richtlinien euchtungs- und Lichtsignaleinrichtung" Centre of reference Bezugspunkt ttom edge Outer edge Inner edge Innere Grenze ere Grenze Äußere Grenze (1) mm (O) mm B)mm 50 13 50