

# INSTRUCTION SHEET

for: **Part No. 2053 / 2053-PC / 2053-GMD**



## ADR - APPLICATION AND MOUNTING INSTRUCTIONS

ADR 45/01 Side Marker Lamp


### *DuraLED*® SIDE MARKER LAMP

#### Lens Marking and ADR 13/00 Installation Requirements

This Side Marker Lamp, identified by lens marking 9560 and the logo was manufactured to comply with ADR 45/01 Side Marker Lamps.

- A tolerance of +/-3 degrees applies on all mounting details.
- Lamp mounting surface must be vertical to the ground and be parallel to the vehicle longitudinal axis.
- Lamp reference axis must be horizontal, with the lamp's red side facing rearward.  
(Note logo with the text "9560" is on the red side - see diagram below)
- Lamp must be visible between:
  - Horizontal angle: From 5° out to 85° out at the front and at the rear
  - Vertical angle: 10° above and below the horizontal

Note: Please refer to ADR 13/00 for more details.

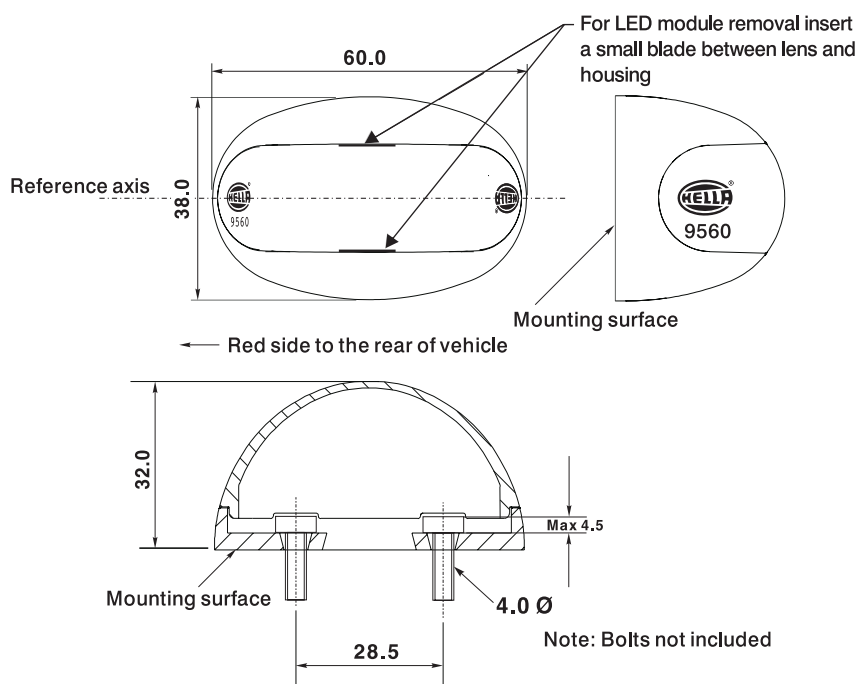

Note: Bolts not included

All dimensions in millimetres

LENS IDENTIFICATION NUMBER: 9560

CATALOGUE NUMBER	ENGINEERING NUMBER	CRN NUMBER	COMPLIANCE NUMBER	ADR 51/00 GLOBE	ADR APPLICABLE
2053 2053-PC 2053-GMD	2PS 959 660-50 2PS 959 660-53 2PS 959 660-56	24743	8-2053-08	N/A LED	ADR 45/01
AMENDMENTS				ADR COMPLIANCE VERIFIED 	ISSUE DATE:
04/2009					02/00
					959 149-16

HELLA-New Zealand Limited, Auckland

## INSTRUCTION SHEET

for: **Part No. 2053 / 2053-PC / 2053-GMD**



### LED Module Instructions


To remove the LED module hold the housing near the base and push firmly on the back of the module.  
Note: The LED module is fully sealed and has no serviceable components.

The LED module is securely fastened to prevent dislodging in service, and removal would not normally be required. If it becomes necessary to remove the module, insert a small blade on both sides of the LED module and the housing at the correct position and prise the module free from the housing (See diagram over page).


### Lamp Mounting Instructions

4mm Ø bolts are recommended with a maximum head height of 4.5mm (not included).

#### 2042 replacement

The existing 2042 mounting holes may be used. Connect the wiring through the housing to the LED module (see wiring instructions). The red side of the LED is the same side as the  logo, or check by operating the lamp. Push the LED module firmly into the housing until it snaps into position.

#### New installations

Ensure the lamp is mounted on a flat surface. The housing may be used as a template for the mounting holes. Do not mount the lamp where damage is likely to be sustained due to tie-downs and other securing devices. Drill two mounting holes up to 4.5mm Ø 28.5mm apart and mount the housing. Drill cable entry hole in the centre of the mounting holes at a recommended size of 6mm to 8mm Ø and ensure the hole has no sharp edges to chafe the cable. Push the cable through the hole and connect the wiring (see wiring instructions). The red side of the LED is the same side as the  logo with the text "9560", or check by operating the lamp. Push the LED module firmly into the housing until it snaps into position.

### Wiring Colour Coding

The *DuraLED*® marker range is multi voltage capable allowing full light output between 8 and 28 volts. LED modules are polarity conscious. Reverse polarity will not damage this product but will inhibit its function. HELLA recommends wire connections be soldered, and heat shrink tubing applied to seal the joint.

Colour	Connect to	Power Consumption
Black	Earth (-)	-
Red	Positive(+)	0.4 watts @ 12 volts 0.8 watts @ 24 volts

#### Energy saving recommendation for 24 volt systems

To derive the full benefit of the low power consumption (0.4 watts) HELLA recommends to wire pairs of *DuraLED*® marker lamps in series.

**NB:** Lamp must be protected by a fuse rated at 2 amperes maximum.

### Warranty Statement

**Congratulations!** The product you have selected comes from HELLA - one of the world's leading manufacturers of lighting products. The product comes with a Lifetime Warranty covering faults in materials, components or workmanship.

In the unlikely event that you should experience a confirmed warranty related problem with your purchase, HELLA will, at its discretion, either repair or replace the product or refund the purchase price.

Warranty services may be obtained by returning the product within the warranty period to the HELLA Dealer where the product was originally purchased. This warranty is in addition to and does not preclude any other rights or remedies available to the consumer under any local legislation related to the provision of goods or services.

Our goods come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and for compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure.

Lifetime means the economic life of the vehicle these products were first installed on.

This warranty does not cover:

- 1.) Claim/s as a result of normal wear and tear or of any modifications, alterations non-compliance of assembly, service and operating instructions and/or any unfit or improper use.
- 2.) Any expenses incurred in the process of making the claim.

Note: For lamps sold in Australia warranty services are provided by HELLA Australia Pty Ltd, 54-76 Southern Rd, Mentone VIC 3194.  
Customer Service 1800 061 729 <http://www.hella.com/hella-au/21.html>

For general comments about HELLA's products please contact us on E-mail at: [techfeedback@hella.co.nz](mailto:techfeedback@hella.co.nz)