





Technology with Vision

NEW RELEASE

- Compact reversing lamp
- 1150 lumen light output
- 20° inclination mounting*



All dimensions in mm

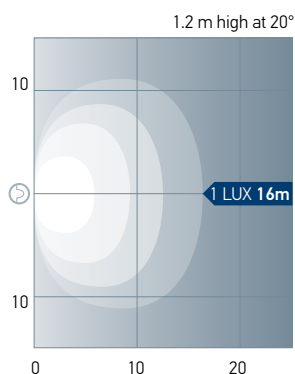


Q110R REVERSING LAMP COMPACT DESIGN

The Q110R reversing lamp delivers 1150 lumens of light in an incredibly compact form factor, making it ideal for challenging rearward mounting locations. A thermally conductive housing combined with over-temperature protection ensures safe, reliable operation while maintaining lighting efficiency. The ECE approved 20° inclination* supports space-saving installation where mounting space is limited.



Part Number	Description
2ZR 996 285-501	Q110R Compact Reversing Lamp - DT Connector
Mounting	Suitable for upright or pendant mounting. Lamps incline 20° downwards for ECE approval*
Voltage	Multivolt™ for optimum brightness at input voltages from 10 to 32 volts.
Power Consumption	11W
Lumen	1150 lumen
Material	Housing: Thermally conductive plastic Bracket: Glass fibre reinforced plastic
Protection	IP 6K7 (Protection against dust and temporary water immersion) IP 6K9 (Protection against dust and high-pressure/steam jet cleaning)
Cable	1m of multi-core cable with DT socket
Compliance	ECE R10, ECE-R148, ADR/GGVSEB

*Meets ECE-148 approval for Reversing Lamps when inclined at 20° mounting angle.



DT Connector
Pin 1: Power supply, white
Pin 2: Earth, black