





INSTALLATION INSTRUCTION

WORK LAMPS MODUL 70-I/II / POWER BEAM I/II/III / REVERSE LAMP MODUL 70-I / POWER BEAM I



PRODUCT LIABILITY

- National mounting, fitting and operating regulations must be heeded and kept.
- Please read all the instructions and safety notes included before using the device.
- We reserve the right to make technical and optical modifications within the course of product improvement.
- Only use original spare parts or spare parts approved by HELLA.
- HELLA shall not assume any liability for damage caused by improper handling, incorrect installation, or a defective product! If you have any questions about the product or installation, please contact your supplier or trading partner.
- If you have any questions or problems with the installation, please contact HELLA Customer Services, a wholesaler or your garage.
- Further information is available on our website (www.hella.com/techworld)

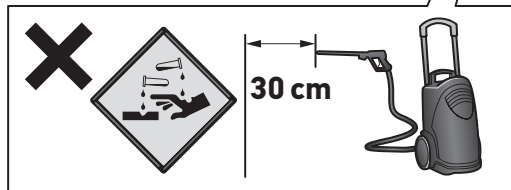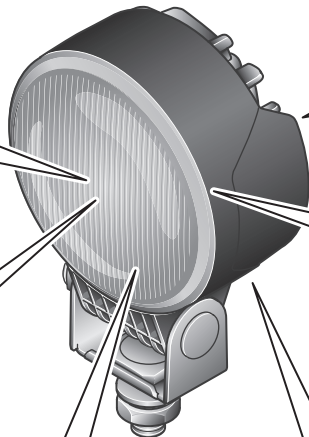

Headlamp must not be covered.

Explanation symbols



(EN) Correct



(EN) Incorrect



(EN) Location/Position Arrow



(EN) Movement Arrow



(EN) Warning



(EN) Disconnect



(EN) Connect



(EN) Look/See




(EN) Warning

Scope of delivery


Modul 70-I/II LED
1G0 996 776-XXX

Modul 70 Reverse Lamp LED
2ZR 996 776-5XX





Power Beam I/II/III LED
1GA 996 588-XXX
1GA 996 688-XXX


Power Beam Reverse Lamp LED
2ZR 996 588-5XX




Installation tools required



13 / 17





Ø10,5 mm



Mounting


REVERSE LAMP

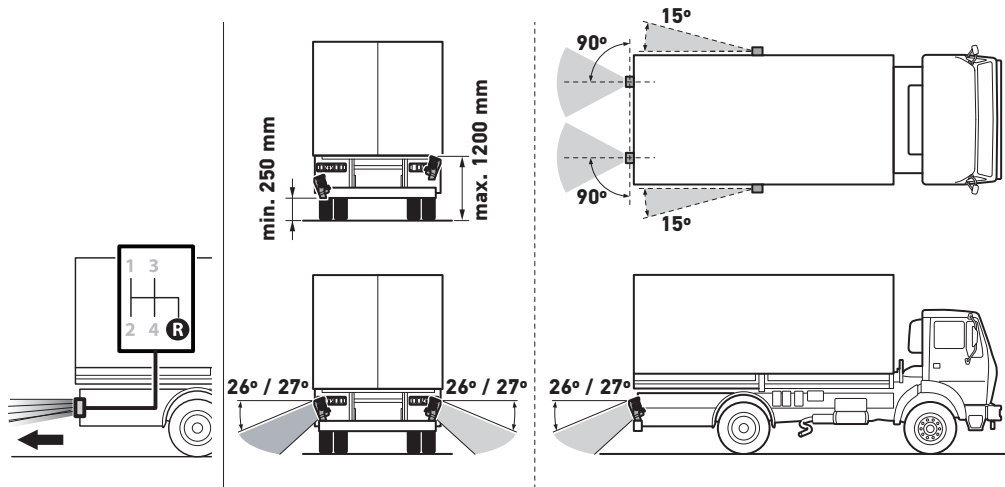









Modul 70-I/II LED
1G0 996 776-XXX

Modul 70 Reverse Lamp LED
2ZR 996 776-5XX









Power Beam I/II LED
1GA 996 588-XXX
1GA 996 688-XXX





Power Beam Reverse Lamp LED
2ZR 996 588-5XX








Modul 70-I/II LED
1G0 996 776-XXX

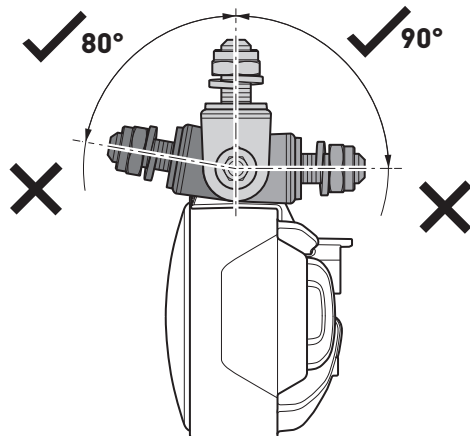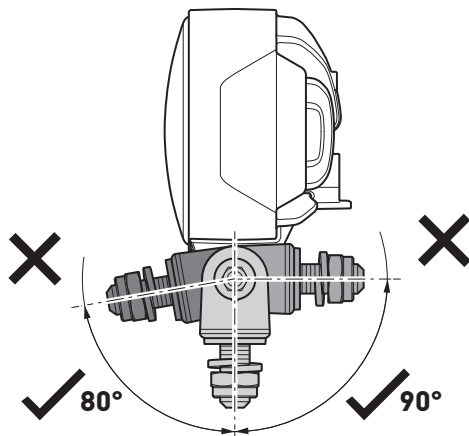

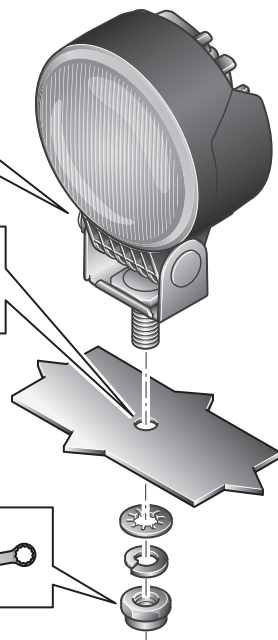

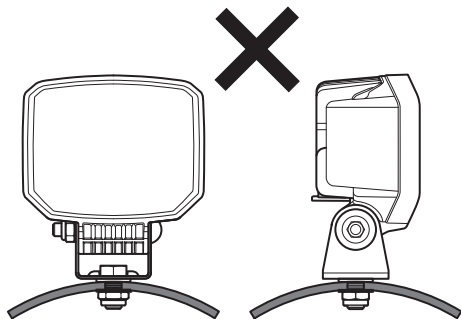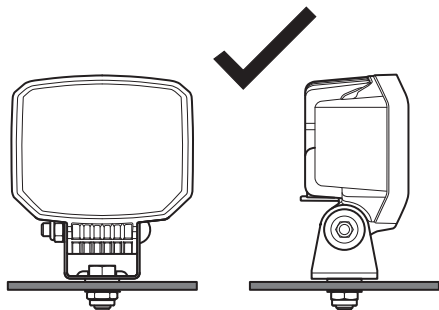










**Power Beam Reverse
Lamp LED
2ZR 996 588-5XX**



**Modul 70 Reverse
Lamp LED
2ZR 996 776-5XX**





Electrical connection


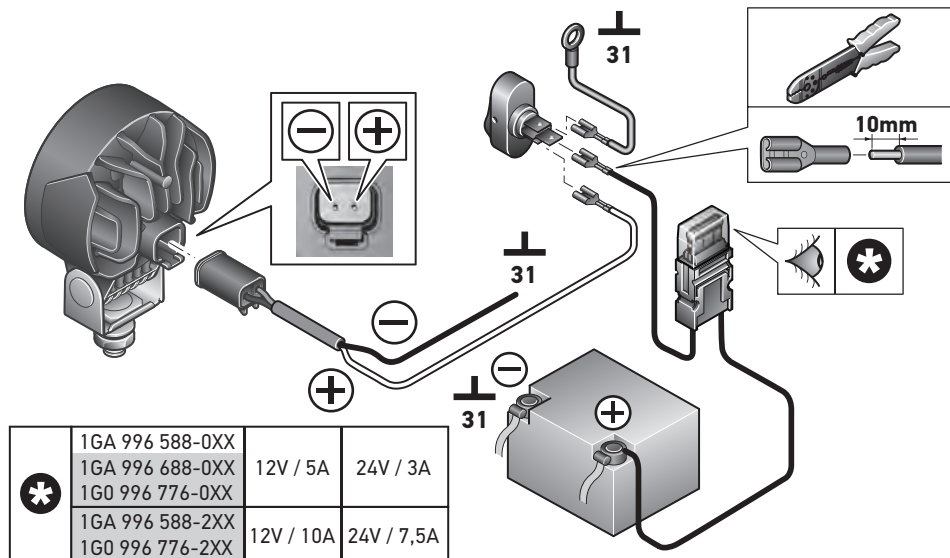


Electrical connection

2ZR 996 588-5XX

2ZR 996 776-5XX

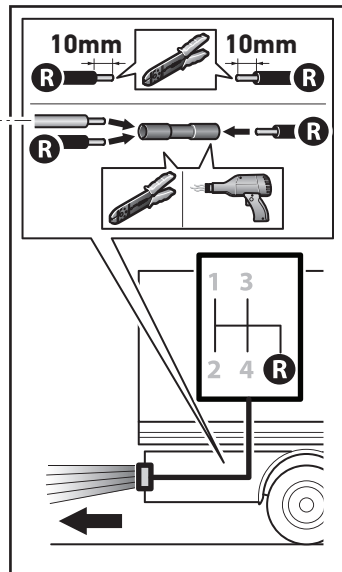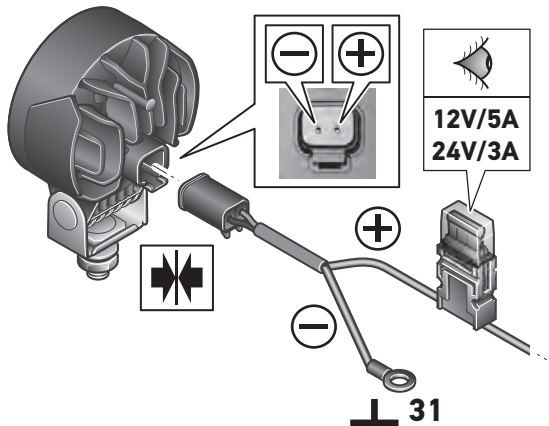

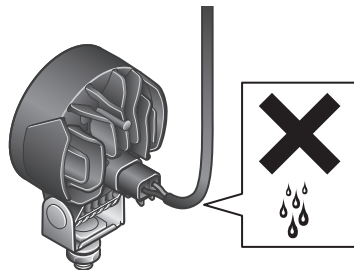

	Nominal voltage	Range of voltage	Input values	Admissible ambient temperature	Class of protection
1GA 996 588-0XX 2ZR 996 588-5XX	12 V	9V-32V	$\leq 1,02A \leq 12W$	-40° C +85° C	IP 6K9K IP 6K7
1G0 996 776-0XX 2ZR 996 776-5XX	24V		$\leq 0,55A \leq 12W$		
1GA 996 588-2XX	12 V		$\leq 1,55A \leq 18W$		
1G0 996 776-2XX	24V		$\leq 0,78A \leq 18W$		
1GA 996 688-XXX	12 V		$\leq 1,815A \leq 22W$		
	24V		$\leq 0,88A \leq 21W$		

Operation of the light using alternating voltage or clocked direct voltage is not permitted!

The fuse must be calculated according to the power of the consumer and the required cable cross-section.

- Reversing lights are homologated according to ECE R148.



HELLA GmbH & Co. KGaA

Rixbecker Straße 75
59552 Lippstadt /Germany

www.hella.com

© HELLA GmbH & Co. KGaA, Lippstadt

EN Check that the lighting system is working perfectly

EN Please dispose of the packaging and the product in accordance with the national and regional recycling regulations and laws.

EN Subject to alteration without notice